


Sales Director: Darcy
Whatsapp: 008613425174299
Email: Darcy@szledworld.com

Rental outdoor led display (640x640cabinet)



Features:

- High contrast,ideal gray scale,presenting The clear and bright pictures
- Adopting SMD3535 LEDs,Big viewing Angle(>140° H;>140° W)
- Tiny splicing gap, light weight & ultra-thin Cabinet.
- Easy to install: No tool needed during Installation
- Front side IP65,rear side IP43.

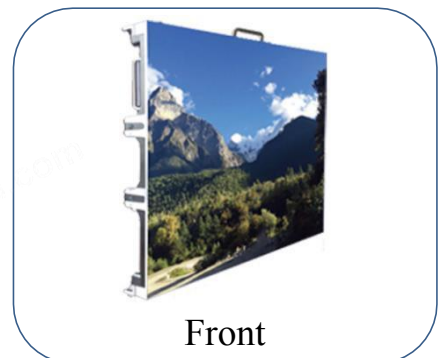

Application:

Stage Performance Conference Celebration banquet exhibition

Technical Specifications:

Parameters	Outdoor Die-casting LED Display Series			
Pixel Pitch (mm)	5mm	8mm	10mm	10mm
Pixel density(pix/m2)	40000	15625	10000	10000
LED Type	2727	3535	3535	DIP346
Viewing Angle	X、Y120°	X、Y120°	X、Y120°	X、Y120°
Brightness(nits)	≥5000	≥5000	≥6500	≥6500
Drive Method	1/6	1/5	1/2	1/2
Color Depth	65536			
Refresh Rate(Hz)	1920	1920	1920	1920
Module Size (mm)	320×160×16			
Cabinet Size(mm)	640×640×80			
Cabinet Material	Die casting aluminum			
Cabinet weight(kg)	17	17	17	17
Voltage	110-240V			
Average.power(W/m2)	230	230	230	230
Max.power (W/m2)	700	700	700	700
IP Grade	IP65/IP43			
Operating temperature/humidity	temperature : -20°C ~ 50°C humidity : 10 ~ 90%RH			
Storage temperature/humidity	temperature : -40°C ~ 60°C humidity : 10 ~ 90%RH			
Lifetime(h)	≥50000			

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to Led World.